


# SUPERIOR FLOAT TANKS

## MASONS WAFFLE PAD INSTALLATION DETAILS

If you ordered the Mason anti-vibration pads for your deluxe float suite, 2 pieces of luan or plywood are needed to be installed between the pads and the tank as shown in the diagrams below. The 2 pieces of plywood need to be pre-cut to 4' by 6' and on site when the float tank installers arrive on installation day. Due to the size and sourcing of the plywood this responsibility is left to the customer.

Typically the hardware store will be able to cut the plywood to length in the store at the time of purchase.

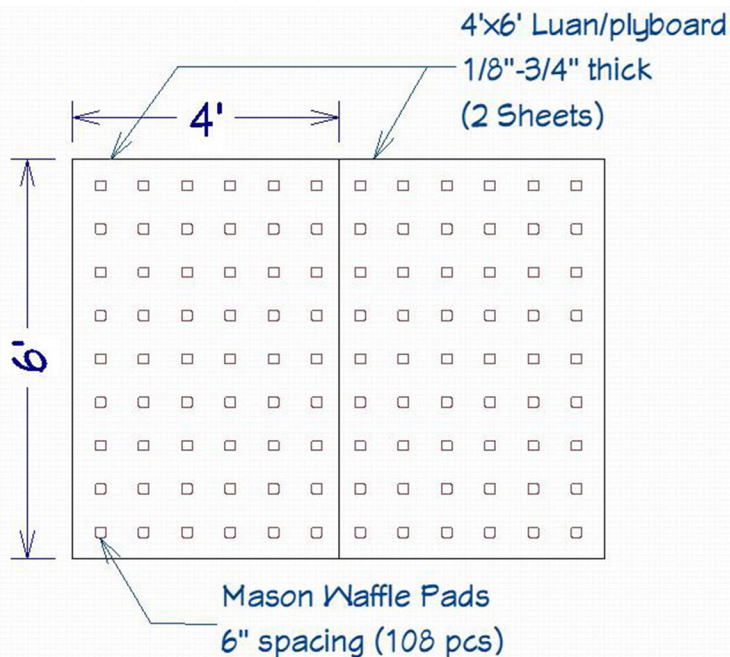

Step 1. Layout pads in a grid with 6" spacing between them.



Step 2. Set 2 sheets of luan or plywood over mason pads.



Step 3. Assemble float room on top of luan / plywood platform.

